

Panther Batterien

Batteriedatenblatt



CTX9-BS

ETN: 508 0 12 008


DIN: 50812

Specifications

Model NO.	CTX9-BS DIN:50812 ETN:508012008	
Same Dimensions As YUASA Model	YTX9-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	8 AH	
Dimension	Length	150 mm (5.90 inches)
	Width	87 mm (3.43 inches)
	Height	105 mm (4.13 inches)
	Total Height	105 mm (4.13 inches)
Approx. Weight	Approx.3.0kg (6.6Lbs)	
Charge Current (A)	0.8 A	



Dimensions

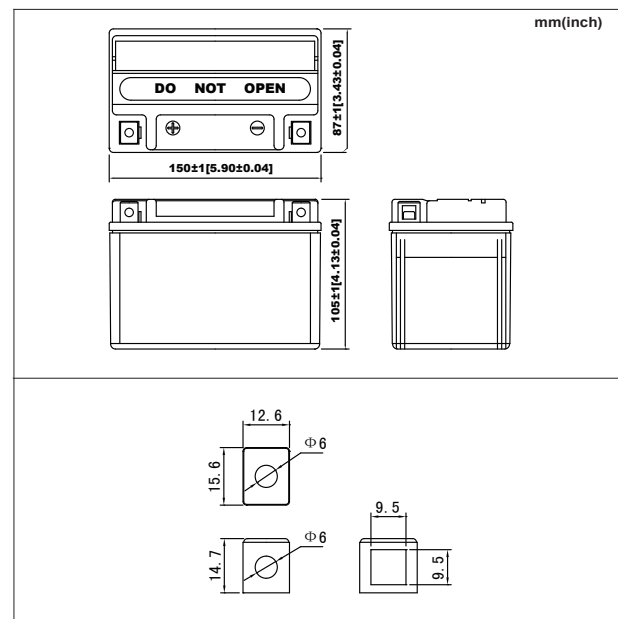

Characteristics

Capacity 25°C(77°F)	10hours rate (0.8 A to 10.5V)	8.0Ah
	5hours rate (1.6 A to 10.2V)	6.8Ah
	1C (8.0 A to 9.6V)	3.6Ah
	3C (24.0 A to 9.6V)	2.9Ah
Cold Cranking Amperes(-18°C SAE Standard)	90 A	
Cold Cranking Amperes(-18°C EN Standard)	135 A	
Internal Resistance (at 1KHz)	Approx.7.0mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

